



## DP-75 4B




1/2" Diam Bolts @ 4-1/2" OC  
Bolt height 1"




Plinth size - 5-5/8" Sq  
Rotation -19 degrees CCW

## DP-100E 4B Square Top




5/8" Diam Bolts @ 4" OC - N/S, E/W  
Bolt height 2-3/8"

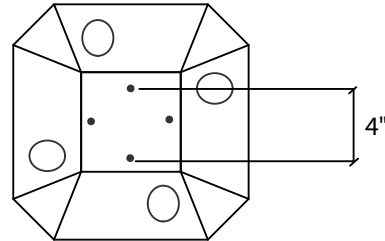


Plinth size - 5-3/8" Sq  
Rotation - Orthogonal (square to pier)

## DP-100E 4B Twist Top




5/8" Diam Bolts @ 5-1/4" OC  
Bolt height 1" - Optional 2-1/4" Bolt height

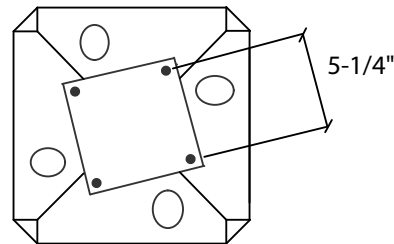


Plinth size - 6-1/4" Sq  
Rotation -19 degrees CCW

## DP-200E 4B

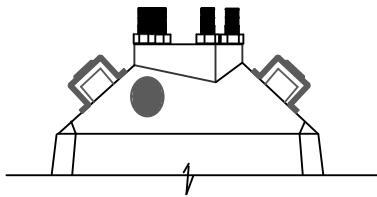

3/4" Diam Bolts @ 7-1/2" OC  
Bolt height 3-1/8"

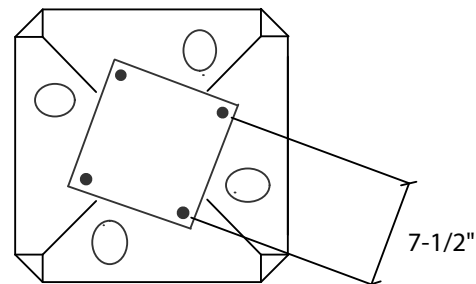

Plinth size - 9" Sq  
Rotation -19 degrees CW

US PAT. #5039256, #6910832, & #7326003

ALL DETAILS IN WHOLE OR IN PART, OR ANY PORTION THEREOF, ARE COPYRIGHTED BY PIN FOUNDATIONS, INC., AND MAY BE USED BY THE RECIPIENT OR THEIR ASSIGNS FOR PROJECT APPLICATIONS ONLY.

©2018 PIN FOUNDATIONS, INC. ALL RIGHTS RESERVED. DOC0027/01.2018

*PIN FOUNDATIONS, INC.*

GIG HARBOR, WASHINGTON  
(253) 858-8809